Docket No.

PATENT 6169-125

PATENT APPLICATION TRANSMITTAL LETTER

d Assistant Commissioner of Patents

BOX PATENT APPLICATION

Washington, DC 20231

Transmitted herewith for filing of the patent application of:

Inventor(s):

Thomas A. Kist, Boynton Beach, FL

Burn L. Lewis, Ossining, NY

Bruce D. Lucas, Yorktown Heights, NY

for METHOD AND APPARATUS FOR EXECUTING VOICE COMMANDS HAVING DICTATION AS A PARAMETER .

are the following:

X Specification, including Abstract

assignment recordal fee

- 3 Sheets of drawing (3 sets)
- X Executed Declaration and Power of Attorney
- X Executed Assignment and Recordation Cover Sheet
- X Other: 2 postcards

CLAIMS	AS	FILED

NO. FILED	NO. EXTRA
-20- 21	1
-3- 3	0
	-20- 21

If the difference in Col. 1 is less than zero, enter "0" in Col. 2

Small Entity

	····
RATE	FEE
	\$
x \$ 9 =	\$
x \$ 39 =	\$
x \$130 =	\$
TOTAL	\$

Other than a Small

Entity					
RATE	FEE				
	\$760				
x \$ 18 =	\$ 18				
x \$ 78 =	\$ 0				
x \$260 =	\$ 0				
TOTAL	\$778				

\$ 40

 Please	charge	my	Deposit	Account	No.	17-0055	in	the	amount
of \$			_					00	um um um u

X A check in the amount of \$818.00 is enclosed.

X The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 17-0055. A duplicate of this sheet is enclosed.

X Any additional filing fees required under 37 C.F.R. 1.16.

X Any patent application processing fees under 37 C.F.R. 1.17.

No fee enclosed No fee is authorized,

7/7/99 Daté

1

Gregory A. Welson

Registration No. 30,577
"EXPRESS MAIL" MAILING LABEL NO.: EE444320653US

7 ..

6169-125

### **METHOD AND APPARATUS FOR EXECUTING VOICE COMMANDS** HAVING DICTATION AS A PARAMETER

Inventors:

Thomas A. Kist Burn L. Lewis

and

Bruce D. Lucas

International Business Machines Corporation IBM DOCKET NO. BC9-99-036

### 15

### CROSS REFERENCE TO RELATED APPLICATIONS

(Not Applicable)

## STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

(Not Applicable)

### BACKGROUND OF THE INVENTION

### 1. Technical Field

This invention relates to the field of computer speech recognition and more particularly to a method and system for executing voice commands having ordinary dictation as a parameter.

### 2. Description of the Related Art

Speech recognition is the process by which an acoustic signal received by microphone is converted into a set of words by a computer. These recognized words may then be used in a variety of computer software applications. For example, speech recognition may be used to input data, prepare documents and control the operation of system and application software.

Speech recognition systems can recognize and insert dictated text in a variety of software applications. For example, one can use a speech system to

5

dictate a letter into a word processing document. Simply stated, a speech recognition engine receives the user's dictated words in the form of speech signals, which it processes using known algorithms. The processed signals are then "recognized" by identifying a corresponding text phrase in a vocabulary database. The text is then conveyed to an active software application, where it is displayed. This type of spoken utterance is considered to be ordinary dictation because it is merely transcribed and does not execute a control command.

As mentioned, the speech recognition system may also be used to control the operation of voice-enabled system and application software. Typically, the software is controlled by a user issuing voice commands for performing system or application events. There are two broad categories of speech recognition systems for executing voice commands: natural language understanding (NLU) systems and finite state grammar systems. NLU systems permit total linguistic flexibility in command expression by recognizing as commands, spoken phrases in terms naturally intuitive to the speaker. For example, an NLU system is likely to recognize the spoken utterance, "would you be a dear and open the Pensky file for me?", as instructing the system to execute a "file open" command for the file named "Pensky". However, NLU systems are extremely complex, and at this point, operate only on very sophisticated computers.

5

Consequently, the vast majority of commercial speech recognition systems are finite grammar systems. In a simple finite grammar system, the user in the above example would utter a much more structured phrase, such as, "open file Pensky". Upon receiving the speech signals corresponding to the spoken phrase, the speech recognition engine processes the signals to determine whether they correspond to a command coded within one or more command sets or grammars. If so, the command is processed and executed by the software so as to perform the corresponding event, in this case, opening the "Pensky" file.

The simplest command grammars correlate each command or function that the system can perform to one speech command. More advanced finite state grammar systems allow for increased linguistic flexibility by including alternative commands for performing each function, so that a speaker can utter any one of a number of expressions to perform the event. Typically, these systems convert spoken phrases into one of a finite set of functional expressions using translation rules or by parsing annotation in the grammar. These systems, despite having a finite grammar system, enable a user to speak more naturally when issuing voice commands.

As stated, existing speech recognition systems are capable of receiving speech signals from a user and either recognizing the signals as ordinary dictation or as a voice command for performing an event. However, typical

OBMKF\4383559.3 4

5

speech systems are unable to recognize voice commands that include ordinary dictation so as to execute a command having dictation as a parameter.

One example of such a voice command is, "send a note to Bill regarding today's meeting", which is intended to call up an E-mail application that will send a message to a colleague named "Bill" with "today's meeting" displayed in the message subject text field. Typical speech systems are likely to interpret this statement as ordinary dictation, transcribing the entire spoken phrase as text in a document, despite the fact that it includes elements of both a command and ordinary dictation. Alternatively, the statement may be recognized only as a command to execute the E-mail application, without inserting the dictation "today's meeting" in the subject line.

A basic reason existing speech systems have difficulty with these types of mixed voice commands is that the command grammars contain only a finite number of command patterns. It is impractical, if not impossible, to code into a command grammar the tens of thousands of words or word combinations in a given language. Thus, typical systems limit the grammar sets to contain phrases indicating functions relevant to performing computer software events. These functional phrases comprise a much smaller sub-set of an entire language, yet are extremely useful in carrying out software application events. Because the vast majority of phrases used in ordinary dictation are left out of the command grammars, typical finite speech systems are unable to incorporate the dictation portion in commands.

QBMKE\4383559.3 5

Accordingly, there is a need to provide a finite grammar speech recognition system able to execute voice commands having ordinary dictation as a parameter.

### SUMMARY OF THE INVENTION:

5

The present invention provides a method and system to execute voice commands, having ordinary dictation as a parameter, for performing system and application software events.

Specifically, in a system adapted for speech recognition, the present invention provides a method for executing a voice command in the form of a spoken utterance having a dictation portion. The method begins by receiving a user input corresponding to the spoken utterance. This input is processed to identify a pattern of words forming the spoken utterance which matches a predetermined command pattern. A computer system command is identified that corresponds to the pre-determined command pattern and has at least one parameter. The one or more parameters are extracted from words contained in a dictation portion of the voice command which are distinct from the pattern of words matching the command pattern. The computer system command is then processed to perform an event in accordance with the one or more command parameters.

20

Another aspect of the invention is that the words forming the dictation portion of the voice command may be embedded within the pattern of words

20

matching the command pattern. The dictation portion of the voice command can be comprised of any set of words in a voice recognition engine vocabulary. Consequently, the event performed by the system can include inserting the dictation portion of the spoken utterance at a location in a word processing document or any other location specified by the computer system command.

Still another aspect of the invention is that the system may identify a pattern of words in the spoken utterance to match any one of a plurality of the pre-determined command patterns. Each of the plurality of command patterns can belong to at least one pre-determined command pattern set. According to a preferred embodiment, a command pattern in any of the sets can only be matched when the set is in an active state. The command pattern sets are placed in an active state according to the operating state of the computer system. If no pattern of words forming the spoken utterance matches the predetermined command pattern, the system provides a software application with recognized text.

Another preferred embodiment of the present includes a system for executing a voice command in the form of a spoken utterance having a dictation portion. Specifically, the system includes programming for receiving a user input corresponding to the spoken utterance. The system also includes programming for identifying a pattern of words forming the spoken utterance which matches a pre-determined command pattern as well as a computer system command that corresponds to the pre-determined command pattern and

7

QBMKE\4383559.3

5

has at least one parameter. Also, the system includes programming for extracting the one or more parameters from words contained in a dictation portion of the voice command, which are distinct from the pattern of words matching the command pattern. The computer system command is then processed to perform an event in accordance with the one or more command parameters.

Another aspect of this system is that the words forming the dictation portion of the voice command may be embedded within the pattern of words matching the command pattern. The dictation portion of the voice command can be comprised of any set of words in a voice recognition engine vocabulary. Consequently, the system can include programming for inserting the dictation portion of the spoken utterance at a location in a word processing document or any other location specified by the computer system command.

Yet another aspect of this system is that it includes programming to identify a pattern of words in the spoken utterance to match any one of a plurality of the pre-determined command patterns. Each of the plurality of command patterns can belong to at least one pre-determined command pattern set. According to another preferred embodiment, a command pattern in any of the sets can only be matched when the set is in an active state. The command pattern sets are placed in an active state according to the operating state of the computer system. If no pattern of words forming the spoken utterance

8

QBMKE\4383559.3

matches the pre-determined command pattern, programming is included to provide a software application with recognized text.

Thus, the present invention provides the object and advantage of recognizing spoken utterances that include a combination of voice commands and ordinary dictation. Once recognized, events can be performed according to the dictation portion of the spoken utterances.

These and other objects, advantages and aspects of the invention will become apparent from the following description. In the description, reference is made to the accompanying drawings which form a part hereof, and in which there is shown a preferred embodiment of the invention. Such embodiment does not necessarily represent the full scope of the invention and reference is made therefore, to the claims herein for interpreting the scope of the invention.

### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 shows a computer system for speech recognition with which the method and system of the present invention may be used;

Fig. 2 is a block diagram showing a typical architecture for the computer system of Fig. 1 having a speech recognition engine;

Fig. 3 is a block diagram showing the architecture for a speech recognition engine using multiple constraints in the recognition process; and

Fig. 4 is a flow chart showing the process for executing voice commands incorporating ordinary dictation according to the present invention.

# T is the many of the state of t

20

5

### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring to the drawings in detail, wherein like reference characters represent corresponding elements throughout the several views, more specifically referring to Fig. 1, a computer system with which the present invention may be practiced is referred to generally by reference number 10. Referring to Figs. 1 & 2, the computer system 10 is preferably comprised of a computer 12 having a central processor 14, at least one memory device 16 and related electronic circuitry (not shown). The computer system 10 also includes user input devices, a keyboard 18 and a pointing device 20, a microphone 22, audio loud speakers 24, and a video display 26, all of which are operatively connected to the computer 12 via suitable interface circuitry. The keyboard 18, pointing device 20 and loud speakers 24 may be a part of the computer system 10, but are not required for the operation of the invention.

Generally, the computer system 10, as described above, can be satisfied by any one of many high-speed multi-media personal computers commercially available from manufacturers such as International Business Machines

Corporation, Compaq, Hailed Packard, or Apple Computers. The memory device 16 preferably includes an electronic random access memory module and a bulk storage device, such as a magnetic disk drive. The central processor 14 may include any suitable processing chip, such as any of the Pentium family microprocessing chips commercially available from Intel Corporation.

QBMKE\4383559.3 10

20

Referring to Fig. 2, which illustrates a typical architecture for a computer system 10 adapted for speech recognition, the system includes an operating system 28 and a speech recognition system 30. The speech recognition system 30 comprises a speech recognition engine application 32 and a voice navigation application 34. A speech text processor application 36 may also be included. However, the invention is not limited in this regard and the speech recognition engine application 32 can be used with any other application program which is to be voice enabled. Also, the speech recognition engine 32, voice navigator 34 and text processor 36 are shown in Fig. 2 as separate application programs. It should be noted, however, that these applications could be implemented as a single, more complex application.

In a preferred embodiment, the operating system 28 is one of the Windows family of operating systems, such as Windows NT, Windows '95 or Windows '98, which are available from Microsoft Corporation of Redmond, Washington. The present invention is not limited in this regard, however, as it may also be used with any other type of computer operating system.

Referring still to Fig. 2, in general, an analog audio signal containing speech commands is received by the microphone 22 and processed within the computer 12 by conventional audio circuitry, having an analog to digital convertor, which produces a digitized form of the signal. The operating system 28 transfers the digital command signal to the speech recognition system 30, where the command is recognized by the speech recognition engine 32.

5

Fig. 3 illustrates an architecture for a finite grammar speech recognition system using multiple constraints during the recognition process. Generally, the speech recognition engine 32 receives the digitized speech signal from the operating system 28. The signal is subsequently transformed in representation block 38 into a useful set of data by sampling the signal at some fixed rate, typically every 10 - 20 msec. The representation block produces a new representation of the audio signal which can then be used in subsequent stages of the voice recognition process to determine the probability that the waveform portion just analyzed corresponds to a particular phonetic event. This process is intended to emphasize perceptually important speaker independent features of the speech signals received from the operating system. In classification block 40, the processed speech signal is used to identify a subset of probable phrases corresponding to the speech signal. This subset of probable phrases is searched at block 42 to obtain the recognized phrase.

Referring still to Fig. 3, classification block 40 is preferably performed by acoustic modeling block 44, context modeling block 46 and lexical/grammatical modeling block 48. At acoustic modeling block 44, known algorithms process the speech command signal to adapt speaker-independent acoustic models, contained in memory 16, to the acoustic signal of the current speaker and identify one or more probable matching phrases.

At block 46, additional algorithms may be used to process the speech signal according to the current state of the computer system as well as context

12 QBMKE\4383559.3

5

events, including prior commands, system control activities, timed activities, and application activation, occurring prior to or contemporaneously with the spoken command. Specifically, these data structures include activities such as: user inputs by voice, mouse, stylus or keyboard; operation of drop-down menus or buttons; the activation of applications or applets within an application; prior commands; and idle events, i.e., when no activity is logged in an event queue for a prescribed time period. The system states and events can be statistically analyzed, using statistical modeling techniques, to identify one or more probable commands matching the context in which the command was given.

At block 48, algorithms conform the digitized speech signal to lexical and grammatical models. These models are used to help restrict the number of possible words corresponding to a speech signal according to a word's use in relation to neighboring words. The lexical model may be simply a vocabulary of words understood by the system. The grammatical model, sometimes referred to as a language model, may be specified simply as a finite state network, where the permissible words following each word are explicitly listed, but is preferably a more sophisticated finite grammar having a plurality of grammar sets containing multiple command patterns, as described below.

In its preferred embodiment, the present invention includes all three of the above-described modeling techniques. However, the invention is not limited in this regard and can be performed using alternative modeling

13

QBMKE\4383559.3

modeling step. Also, each modeling technique may be performed independently from, or interdependently with, the other models.

Referring now to Fig. 4, at step 50, the system receives a user input in the form of a spoken utterance. Spoken utterances can be issued as ordinary dictation, voice commands or voice commands incorporating dictation. Ordinary dictation is a spoken utterance which does not contain a pattern of words recognizable by the system for controlling the operation of system or application software. Instead, dictation is spoken merely to have the system convert the spoken words into text within an electronic document. Typically, a user issues ordinary dictation when preparing a letter or inputting data within an application text field. On the other hand, a voice command is a spoken utterance which causes the system to perform a pre-determined function within system or application software other than simply transcribing text, such as opening a file, deleting text in a document or repositioning an active "window". A voice command incorporating dictation is a combination of these two utterances, having words comprising a dictation portion embedded within a pattern of words comprising a command.

Although the system of the present invention can be used to recognize all three types of spoken utterances, the invention is intended to address the unique difficulties in recognizing voice commands incorporating dictation.

5

Accordingly, the following discussion will focus on the voice commands mixed with dictation.

Typical speech systems are likely to interpret these mixed spoken utterances as ordinary dictation, transcribing the entire spoken phrase as text in a document, or the dictation may be ignored. As mentioned above, the primary reason existing speech systems have difficulty with these types of mixed voice commands is that the command grammars are, by necessity, coded with a limited number of command patterns. Because the vast majority of phrases used in ordinary dictation are left out of the command grammars, typical finite speech systems are unable to incorporate the dictation portion within the command.

Referring still to Fig. 4, the process advances to step 52, wherein the system recognizes whether the spoken utterance contains a recognizable pattern of words by comparing the recognized words against a plurality of predetermined command patterns of words contained in one or more active command pattern sets or grammars. Individual command pattern sets are placed in an active state depending upon the state in which the computer system is operating when the voice command is issued.

An exemplary mixed voice command is, "schedule a meeting on Thursday regarding next quarter's sales plan". This utterance is issued by a user to initiate a voice-enabled scheduling application and insert the text "next quarter's sales plan" in a meeting text field at a calendar location for Thursday.

15

QBMKE\4383559.3

5

The utterance is comprised of the command portion "schedule a meeting on Thursday regarding" and the dictation portion "next quarter's sales plan".

The dictation may be comprised of any set of words in a voice recognition vocabulary, which could consist of tens of thousands of words. The pattern of words forming the command, on the other hand, must conform to the limited command patterns coded into one or more of the active command grammars. Thus, the system searches the active command grammars for a command pattern corresponding to the recognized speech signals.

For the above example, a corresponding command grammar can be coded to include separate scheduling commands for each day of the week. Preferably, however, a primary command pattern is coded into the grammar having a "day" variable marker indicating that the day of the week may any one of the days coded as a sub-command pattern in the same or a different grammar. In this way, the system can schedule a meeting for any day of the week with only one primary pattern coded into the grammar. This technique is not limited to the days of the week, and can be employed for any other category of terms such as months, colors, names, telephone numbers, etc.

At step 54, if the system is unable to match the words of the spoken utterance with a corresponding pre-determined command pattern, the process advances to step 56, at which point the entire phrase is deemed to be dictation. The system then identifies one or more text phrases in a vocabulary

QBMKE\4383559.3 16

5

set corresponding to the entire spoken utterance and inserts the text in an active software application.

Otherwise, at step 58, if a matching command pattern is identified in the preceding step, the system identifies a corresponding computer system command expression. A computer system command is a functional expression used by the system or application software for performing an event. The speech recognition engine coordinates the grammar with a suitable scripting program to cast the computer system command in a form recognizable to the desired speech-enabled system or application software for performing the desired event. The command expression includes one or more parameters corresponding to the voice command. At step 60, at least one of these parameters is extracted from the dictation portion of the voice command. The entire dictation portion may constitute a command expression parameter, or it may be broken down into sub-portions used as separate parameters.

It will be appreciated by those skilled in the art that the precise mechanism for identifying and scripting the command expression can vary from system to system. One approach involves the use of translation or rewrite rules. These rules are coded within the command grammars to generate the command expression. For instance, a translation rule for the above example is "schedule a meeting for <day> regarding <text> \Rightarrow schedulemeeting(<day>,<text>)". This rule includes two variable parameters <day> and <text>. Appropriate day parameters are provided as a sub-

17

QBMKE\4383559.3

5

pattern coded within the active command grammar. The day of the week spoken by the user is matched against this set of sub-patterns and used to identify the intended day of the week in the calendar. The text parameter is extracted from the entire dictation portion "next quarters sales plan". Thus, applying the rule to the spoken utterance of the example, the scripting program generates the computer system command: "schedulemeeting(Thursday, next quarter sales plan)".

This is one example of a translation rule and it will be recognized by those skilled in the art that many different translation rules are possible for use with different commands and formats, all such rules being within the scope of the invention. For systems that do not support translation rules, different methods of producing the command expression of the command would be required. For example, a parsing program can be used for this purpose to parse annotation in the grammar set. It will be appreciated by those skilled in the art that any suitable procedure can be used to accomplish the foregoing result provided that it is capable of taking a given phrase and determining its functional command expression or result.

Referring still to Fig. 4, at step 62, the command expression is sent to the active application to perform the event. In particular, for the above example, the application opens a scheduling program and inserts "next quarter's sales plan" in a suitable meeting text field for Thursday. The process then returns to step 50 to receive additional user input.

QBMKE\4383559.3 18

5

The above example illustrates that the present invention can be used to insert or "paste" the dictation portion of the spoken voice command into a system or application program. However, the present invention is not limited in this regard as the dictation portion may be incorporated into a computer system command to perform any number of functions or events. For example, the user may issue the command "load all files regarding first quarter results". In this example, the system will recognize "load all files regarding" as a pattern of words matching a pre-determined grammar command. A translation rule such as "load all files regarding <text>" ⇒ loadfiles(<text>)", having a single parameter comprising the dictation portion "first quarter results" is applied to create the computer system command "loadfiles(first quarter results)". This command is then used, for example, by a word processing application to search the file names of all stored documents for the text "first quarter results", or the closest match, and then to open up the corresponding files.

While the foregoing specification illustrates and describes the preferred embodiments of the invention, it is to be understood that the invention is not limited to the precise construction herein disclosed. The invention can be embodied in other specific forms without departing from the spirit or essential attributes of the invention. Accordingly, reference should be made to the following claims, rather than to the foregoing specification, as indicating the scope of the invention.

### <u>Claims</u>

We claim:

4

5

6

7

12

13

74. Afr.

1

2

3

1

2

1	1. In a computer system adapted for speech recognition, a method
2	for executing a voice command in the form of a spoken utterance, comprising
3	the steps of:

receiving a user input corresponding to said spoken utterance;

processing said user input to identify a pattern of words forming said spoken utterance which match a pre-determined command pattern;

identifying a computer system command corresponding to said predetermined command pattern, said computer system command having at least one parameter;

extracting said at least one parameter from a dictation portion of said voice command exclusive of said pattern of words; and

processing said computer system command to perform an event in accordance with said at least one command parameter.

- 2. The method according to claim 1 wherein at least one word forming said dictation portion of said voice command is embedded within said pattern of words matching said command pattern.
- 3. The method according to claim 1 wherein said step of identifying said computer system command is performed by using a translation rule.

- 4. The method of claim 1 wherein said dictation portion of said voice command is comprised of any set of words in a voice recognition engine vocabulary.
  - 5. The method of claim 4 wherein said event includes inserting said dictation portion at a specified location defined by said computer system.
  - 6. The method of claim 1 wherein a plurality of said pre-determined command patterns are provided.
  - 7. The method of claim 5 wherein each of said plurality of command patterns belongs to at least one pre-determined command pattern set.
  - 8. The method of claim 6 wherein a command pattern in any of said sets can only be matched when said set is in an active state.
  - 9. The method of claim 8 wherein said set is placed in an active state when said computer system is in a pre-defined computer system operating state.

1	10. The method of claim 1 further comprising the step of:
2	providing recognized text to a software application if no pattern of
3	words forming said spoken utterance matches said pre-determined command
4	pattern.

11. A computer speech recognition system for executing a voice command in the form of a spoken utterance, comprising:

receiver means for receiving a user input corresponding to said spoken utterance;

processor means for processing said user input to identify a pattern of words forming said spoken utterance which match a pre-determined command pattern;

identification means for identifying a computer system command corresponding to said pre-determined command pattern, said computer system command having at least one parameter;

means for extracting said at least one parameter from a dictation portion of said voice command exclusive of said pattern of words;

wherein said processor means processes said computer system command to perform an event in accordance with said at least one command . parameter.

QBMKE\4383559.3 22

1

2

3

4

11

12

13

14

- 12. The system of claim 11 wherein at least one word forming said dictation portion of said voice command is embedded within said pattern of words matching said command pattern.
- 13. The system of claim 11 wherein said identification means uses a translation rule to identify said computer system command.
- 14. The system of claim 11 wherein said dictation portion of said voice command is comprised of any set of words in a voice recognition engine vocabulary.
- 15. The system of claim 14 further comprising an insertion means, wherein said event includes said insertion means inserting said dictation portion of said voice command at a specified location defined by said computer system.
- 16. The system of claim 11 wherein a plurality of said pre-determined command patterns are provided.
- 17. The system of claim 16 wherein each of said plurality of command patterns belongs to at least one pre-determined command pattern set.

10

11

12

1

2

- 18. The system of claim 17 wherein a command pattern in any of said sets can only be matched when said set is in an active state.
- 19. The system of claim 18 wherein said set is placed in an active state when said computer system is in a pre-defined system operating state.
- 20. The system of claim 11 wherein said processor means provides recognized text to a software application if no pattern of words forming said spoken utterance matches said pre-determined command pattern.
- 21. A machine readable storage, having stored thereon a computer program having a plurality of code sections executable by a machine for causing the machine to perform the steps of:

receiving a user input corresponding to a voice command in the form of a spoken utterance;

processing said user input to identify a pattern of words forming said spoken utterance which match a pre-determined command pattern;

identifying a computer system command corresponding to said predetermined command pattern, said computer system command having at least one parameter;


extracting said at least one parameter from a dictation portion of said voice command exclusive of said pattern of words; and


processing said computer system command to perform an event in accordance with said at least one command parameter.


# METHOD AND APPARATUS FOR EXECUTING VOICE COMMANDS HAVING DICTATION AS A PARAMETER


### ABSTRACT OF THE DISCLOSURE

In a computer speech recognition system, the present invention provides a method and system for recognizing and executing a voice command that has a dictation portion. Upon receiving a user input, the spoken utterance is processed to identify a pattern of words which matches a pre-determined command pattern. Then, computer system command is identified that corresponds to the pre-determined command pattern and has at least one parameter. The parameter is extracted from a dictation portion of the spoken utterance which is separate from the pattern of words matching the command pattern. The computer system command is then processed to perform an event in accordance with the parameter. If the spoken utterance does not contain a pattern of words matching a pre-determined command pattern, then the spoken utterance is recognized as dictation and inserted at a specified location into an electronic document or other system or application software.

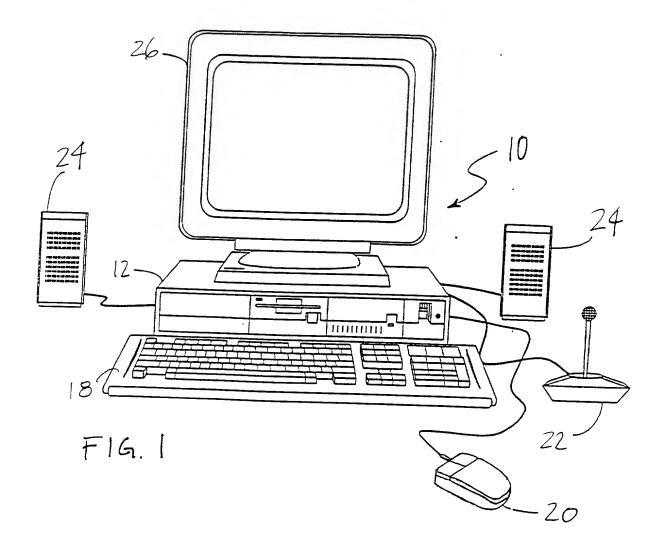

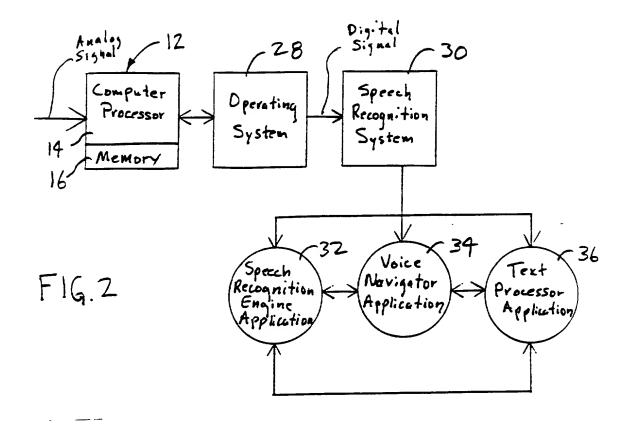

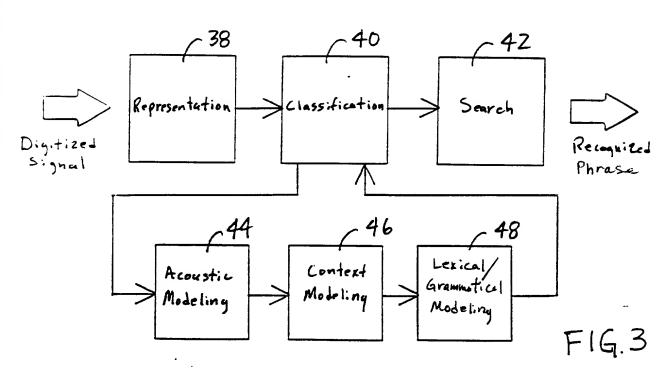

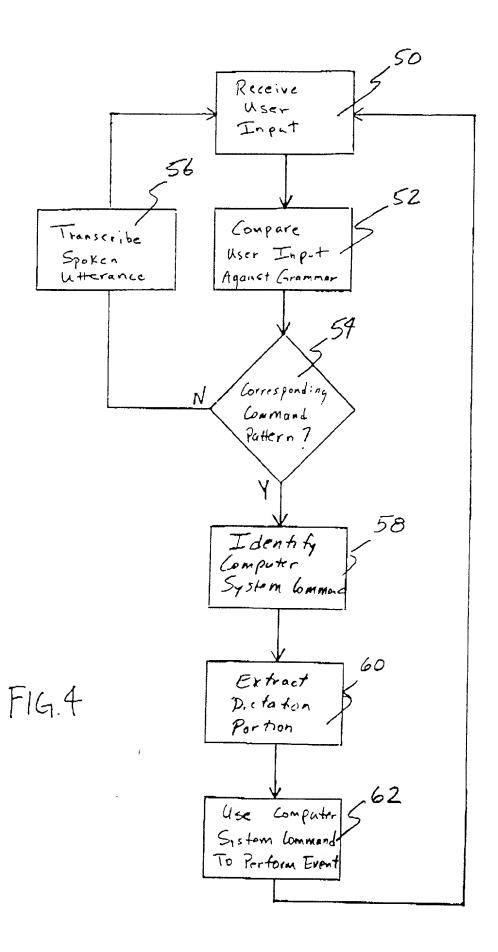

My residence, post office address and citizenship are as stated below next to my name.

METHOD AND APPARATUS FOR EXECUTING VOICE COMMANDS HAVING DICTATION AS A PARAMETER

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent

As a below named inventor, I hereby declare that:

is sought on the invention entitled

P.32/35

PATENT

Express Mail

Label No. EE444320653US

DOCKET NUMBER: 6169-125

HELL HAR

_X_ is atta	sched hereto.				
	iled on				
		et Number			
as Ap	plication Senal N	0	<u>-</u>		
and w	vas amended on _		(if applicable).		
I hereby state t	hat I have review	ed and understand:	the contents of the above	e identified specif	fication, incl
•		amendment referre		·	
Lacknowledg	e the duty to dis	close information :	which is material to the	avamination of t	his annlie <del>s</del> ti
•	•	CONTRACTOR INCIDENTIAL		evenue annu ni f	appucati
accordance wi	ith Title 37, Code	of Federal Regulati	ons Section 1.86(a).		
I hereby claim I	loreign priority be	nefits under Title 3	5, United States Code 11		
I hereby claim I patent or inven- inventor's cert	foreign priority be tor's certificate listificate having a fi	nefits under Title 3 sted below and hav		ny foreign applica hich priority is cl	tion for pate almed:
I hereby claim I patent or inven	foreign priority be tor's certificate listificate having a fi	nefits under Title 3 sted below and hav	5, United States Code 11 8 also identified below ar	ny foreign applica hich priority is cl	tion for pate
I hereby claim I patent or inveni inventor's cert	foreign priority be tor's certificate listificate having a fi	nefits under Title 3 sted below and hav	5, United States Code 11 8 also identified below ar	ny foreign applica rhich priority is cli	tion for pate almed:
I hereby claim I patent or inventinventor's cert	foreign priority be tor's certificate listificate having a fi	nefits under Title 3 sted below and hav	5, United States Code 11 8 also identified below ar	ny foreign applica rhich priority is cli	tion for pate almed: ry Claimed
I hereby claim is patent or inventor's cert inventor's cert (Number)  I hereby claim to listed below as prior United St Section 112, I Regulations, Se	foreign priority be tor's certificate listificate having a fi application(s) the benefit under and, insofar as the tates application if acknowledge the	(Country)  Title 35, United State subject matter of einthe manner provide duty to disclose in occurred between	5, United States Code 11 e also identified below ar it of the application on w	priority is classification priority is classification is not application is not application in Title 37.	tion for pate almed:  ty Claimed  esNo  tes applicate t disclosed inted States ( . Code of Fe
I hereby claim is patent or inventor's cert inventor's cert Prior Foreign A (Number)  I hereby claim to listed below as prior United St Section 112, I Regulations, Se	foreign priority be tor's certificate his ifficate having a fi application(s) the benefit under and, insofar as the tates application i acknowledge the action 1.55(a) whi	(Country)  Title 35, United State subject matter of einthe manner provide duty to disclose in occurred between	5, United States Code 11 a also identified below and tof the application on what of the application on which is a code, Section 120 ceach of the claims of this ded by the first paragraphaterial information as defined by the first paragraphaterial information and the first p	priority is classification priority is classification is not application is not application in Title 37.	tion for pate almed:  ty Claimed  esNo  tes applicate t disclosed inted States ( . Code of Fe

knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize

Page 1 of 2

the validity of the application or any patent issued thereon.

QBWPBU 42959

P.33/35

DOCKET NUMBER:	6169-125
----------------	----------

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

J. Rodman Steele, Jr.	Reg. No. 25,931	Richard A. Tomlin	Reg. No. 24,449
Gregory A. Nelson	Reg. No. 30,577	Winfield J. Brown, Jr.	Reg. No. 31,901
Joseph W. Bain	Reg. No. 34,290	Kenneth A. Seaman	Reg. No. 28,113
Robert J. Sacco	Reg. No. 35,567	A. P. Tennent	Reg. No. 35,807
Scott D. Paul	Reg. No. 42,984	Norman L. Gundel	Reg. No. 30,387
Stanley A. Kim	Reg. No. 42,730		•
Mark D. Passler	Reg. No. 40.764		

Send correspondence to Gregory A. Nelson, Quaries & Brady LLP, 222 Lakeview Avenue, Suite 400, P.O. Box 3188, West Palm Beach, Florida 33402-3188 and direct all telephone calls to Gregory A. Nelson at (561) 653-5000.

عدد الكوار الوارد المراجع المر	ومروني والمتحرب والمت
FULL NAME OF FIRST OR SOLE INVENTOR: Thomas A. KIST INVENTOR'S SIGNATURE: Slower A Kist RESIDENCE: Boynton Beach, Florida	DATE: 6/29/99
CITIZENSHIP: USA	
POST OFFICE ADDRESS: 206 Monterey Square, Boynton Beach, Florida 3343	36
Control of the Contro	
FULL NAME OF SECOND INVENTOR, IF ANY: Burn L. LEWIS	
INVENTOR'S SIGNATURE:	DATE:
RESIDENCE: Ossining, New York	
CITIZENSHIP: USA	
POST OFFICE ADDRESS: 276 Chadeayne Road, Ossining, New York 10562	
FULL NAME OF THIRD INVENTOR, IF ANY: Bruce D. LUCAS	
INVENTOR'S SIGNATURE:	DATE:
RESIDENCE: Yorktown Heights, New York	
CITIZENSHIP: USA	
POST OFFICE ADDRESS: 2408 Mill Pond Road, Yarktown Heights, New York	10598

PATENT

DOCKET NUMBER: 6169-125

### **DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION**

As a below named inventor, I hereby declars that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

### METHOD AND APPARATUS FOR EXECUTING VOICE COMMANDS HAVING DICTATION AS A PARAMETER

the spec	cification of which (check	one)		
	is attached hereto.			
	was filed on under Attorney's Docket as Application Serial No. and was amended on			
	state that I have reviewed ns, as amended by any ar			identified specification, including
	wledge the duty to discl nce with Title 37, Code o			xamination of this application in
patent o		ed below and have al	so identified below any	9 of any foreign application(s) for y foreign application for patent or sich priority is claimed:
Prior Fo	reign Application(s)			Priority Claimed
(Numbe	-1	(Country)	(Filing Date)	YesNa
listed be prior Un Section Regulation	alow and, insofar as the a ited States application in 112, I acknowledge the (	ubject matter of each the manner provided duty to disclose mate occurred between the	of the claims of this a by the first paragraph Irial Information as def	any United States application(s) application is not disclosed in the of Title 35, United States Code, lined in Title 37, Code of Federal or application and the national or
(Appin.	Serial No.)	(Filing Date)		(Status)
on infor knowled under Se	mation and belief are be ge that willful false stater	lieved to be true; an ments and the like so he United States Code	d further that these s made are punishable to and that such willful	rue and that all statements made statements were made with the by fine or imprisonment, or both, false statements may jeopardize

QEWPB\142959

Page 1 of 2

Express Mail Label No. EE444320653US

Anna annug II Annug II apara apara apara annug II annug I

æ

JUN 24 1999 12:19 FR QUARLES AND BRADY LLP561 653 5333 TO 919149454464

DOCKET NUMBER: 6169-125

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

J. Rodman Steele, Jr.	Reg. No. 25,931	Richard A. Tomlin	Reg. No. 24,449
Gregory A. Nelson	Reg. No. 30,577	Winfield J. Brown, Jr.	Reg. No. 31,901
Joseph W. Bain	Reg. No. 34,290	Kenneth A. Seaman	Reg. No. 28,113
Robert J. Sacco	Reg. No. 35,667	A. P. Tennent	Reg. No. 35,807
Scott D. Paul	Reg. No. 42,984	Norman L. Gundel	Reg. No. 30,387
Stanley A. Kim	Reg. No. 42,730		
Mark D. Passter	Reg. No. 40,764		

Send correspondence to Gregory A. Nelson, Quaries & Brady LLP, 222 Lakeview Avenue, Suite 400, P.O. Box 3188. West Palm Beach, Florida 33402-3188 and direct all telephone calls to Gragory A. Nelson at (561) 653-5000.

FULL NAME OF FIRST OR SOLE INVENTOR: Thomas A. KIST			
INVENTOR'S SIGNATURE: DATE:			
RESIDENCE: Boynton Beach, Florida			
CITIZENSHIP: USA			
POST OFFICE ADDRESS: 206 Monterey Square, Boynton Beach, Florida 33436			
FULL NAME OF SECOND INVENTOR, IF ANY BUNL LEWIS			
INVENTOR'S SIGNATURE: DATE: 6/20/99			
RESIDENCE: Ossining, New York			
CITIZENSHIP: USA			
POST OFFICE ADDRESS: 275 Chadeayne Road, Ossining, New York 10562			
FULL NAME OF THIRD INVENTOR, IF ANY: Bruce D. LUCAS			
INVENTOR'S SIGNATURE: BATE: 1 JULY 99			
RESIDENCE: Yorktown Heights, New York			
CITIZENSHIP: USA			
POST OFFICE ADDRESS: 2408 Mill Pand Road, Yorktown Heights, New York 10598			

QBWPB\142959

Page 2 of 2

ij 

diam'

13

207 ¥,,,, Taring George 100